


## Volkswagen

### Manual Service Reset - Cabrio, Golf III, GTi, Jetta III (1993 - 1995) and Jetta (1996)

One of four service codes may be displayed on instrument panel according to distance travelled. Each service code displayed determines the type or level of maintenance required. The service code will flash for approximately 3 seconds in odometer display window as the ignition is turned on. When servicing becomes due (every 7,500 miles), the appropriate service code will flash for approximately 60 seconds. The four service codes available for display are as follows:

- IN 00 (No Service Necessary)
- OEL (Oil Change Service) - Every 7,500 Miles
- IN 01 (Inspection Service) - Every 15,000 Miles
- IN 02 (Additional Servicing Work) - Every 30,000 Miles

After performing the required maintenance, each effected service code displayed must be reset individually. For example, at 15,000 miles service codes OEL and IN 01 will both need to be reset.

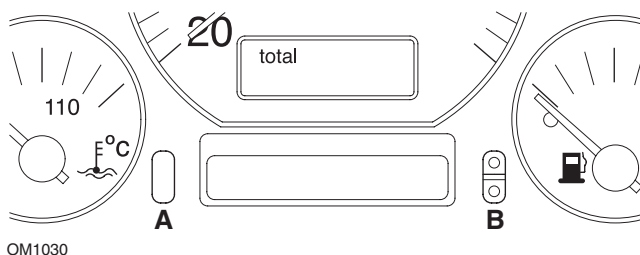

1. To reset the SRI, turn the ignition switch to the ON position.
2. Press and hold the odometer reset button **A**. Whilst holding button A, turn the ignition switch to the OFF position.
3. Service code "OEL" will be displayed. To reset this counter, press and hold button **B** until 5 dashes appear on the display.

# Volkswagen

---

4. If necessary, press the button **A** to display "IN 01". To reset this counter, press and hold button **B** until 5 dashes appear on the display.
5. If necessary, press the button **A** to display "IN 02". To reset this counter, press and hold button **B** until 5 dashes appear on the display.
6. To exit reset mode, turn the ignition switch to the ON position.
7. When "IN 00" is displayed, turn the ignition switch to the OFF position.